

GLOW®

SIMPLY LIGHT

Pendelleuchte BIGMOON

500-39050-060

Speisung 230V 50Hz
Leistung LED 48W
Lichtstrom 4200lm
Lichtfarbe 3000K
Dimmbar DALI
Masse aussen Ø600mm

500-39050-080

230V 50Hz
LED 63W
5100lm
3000K
DALI
Ø800mm

500-39051-060


230V 50Hz
LED 48W
4200lm
4000K
DALI
Ø600mm

500-39051-080


230V 50Hz
LED 63W
5100lm
4000K
DALI
Ø800mm




Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse <F>.



INSTALLATION

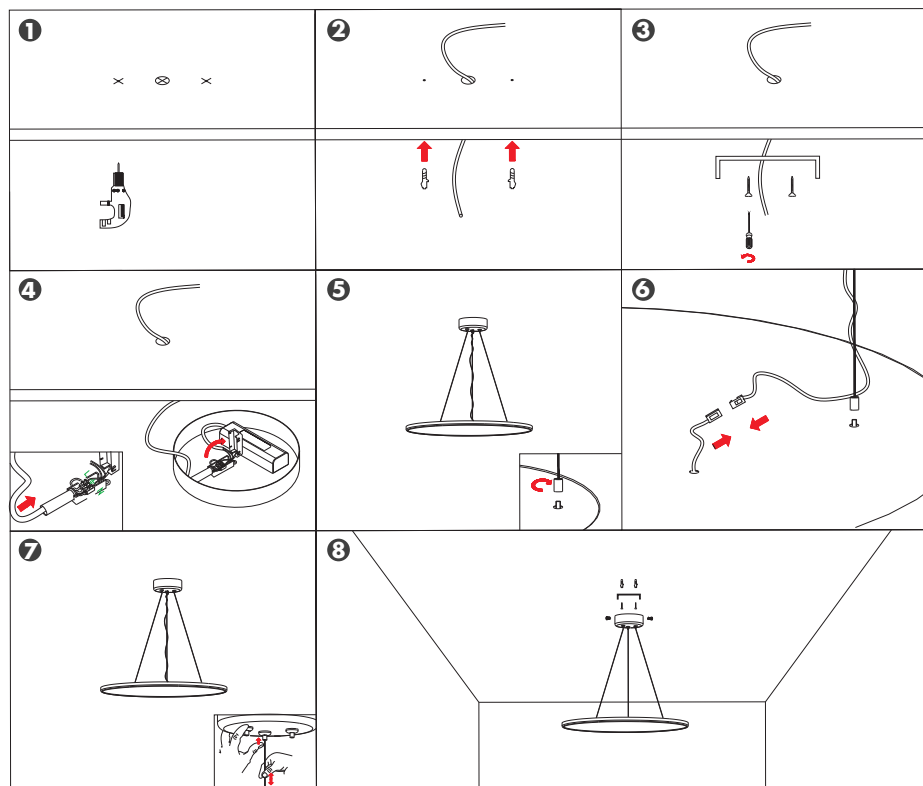

LICHTVERTEILUNGSKURVE

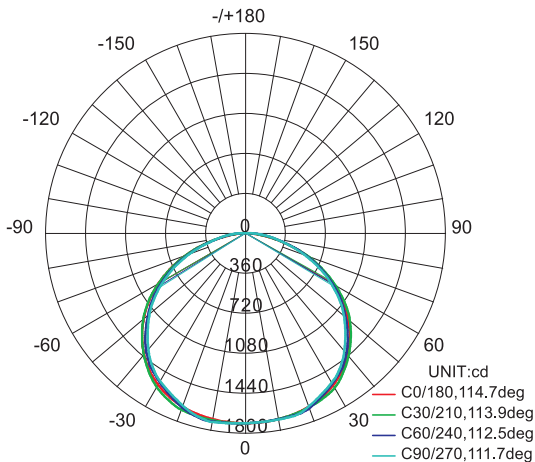

Durchschnittlicher Strahlungswinkel (10%)_ 112.36 DEG

- Please read the specification first, to make sure the environment matches the condition in the specification before using.
- Please confirm the applicable power supply before using.
- Make sure the switch of product is off before connecting to the power supply to prevent electric shock.
- Operation against rules may damage your property and even harm your personal safety.
- Preliminarily estimate required quantity of Round Recessed Flat Panel Light, then according to the power rating of single light to figure out the total power and design power supply plan.
- Dangerous high voltage, Non-professionals are not allowed to maintain the products.
- If the exterior flexible cable or wire is damaged, it must exchange by the supplier, its agent or other similar qualified personnels to avoid dangers.